

Solius Neo

HD heating panel



+ Performance

- **Extensive heat panel and a blackpainted extruded-aluminium** heating element and wide heating surface
- Adaptive start controls for anticipating heating to achieve the required temperature at a set time

+ Installation

- Foolproof safety thanks to Class II, IP 24 protection and dual electric insulation
- Easy to install: H-shaped vertical support

+ comfort

- **Enhanced comfort with accurate 0.5°C temperature adjustment**
- **Instantaneous feeling of warmth and even heat distribution**

+ Energy savings

Thanks to smart pilot functions:

- Open/close window detection
- **Adjustable programming setting per day and hour**

+ Design

- 2 formats



Horizontal



Vertical


- 1 color





White

Models


Horizontal

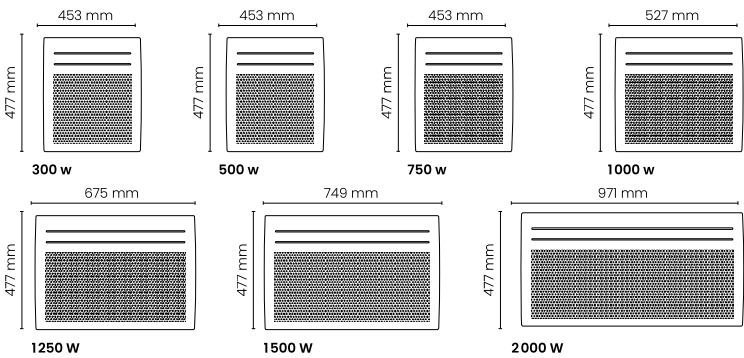

Vertical

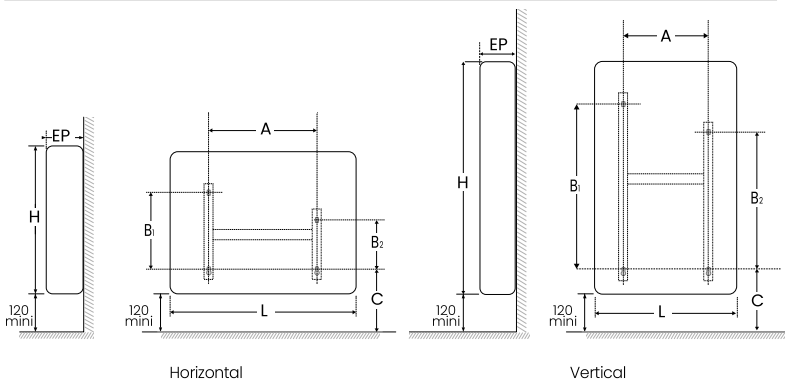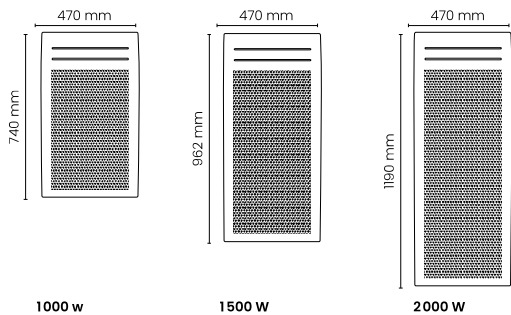

Programmable digital control unit.

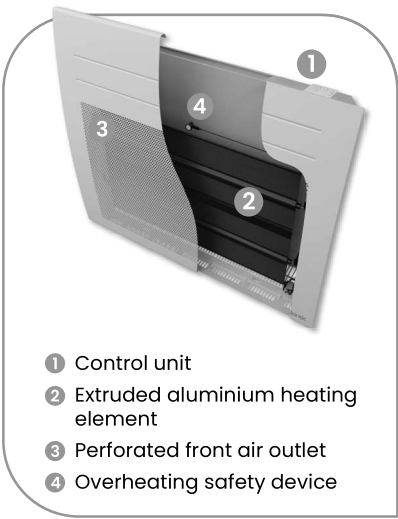

Technical specification

Model	Power (Watts)	L x H x D (mm)	A (mm)	B1 (mm)	B2 (mm)	C (mm)	Weight (kg)
Horizontal	300	453 x 477 x 130	195	246	158,5	191	4,5
	500	453 x 477 x 130	195	246	158,5	191	4,5
	750	453 x 477 x 130	195	246	158,5	191	4,5
	1000	527 x 477 x 130	269	246	158,5	191	5
	1250	675 x 477 x 130	417	246	158,5	191	7
	1500	749 x 477 x 130	491	246	158,5	191	7
	2000	971 x 477 x 130	713	246	158,5	191	10
Vertical	1000	470 x 740 x 117	269	532	444	191	6
	1500	470 x 962 x 117	269	754	666	191	8
	2000	470 x 1190 x 117	269	976	888	191	10